



Multi-channel flat fan nozzles for air “Whisperblast”, stainless steel version Series 600.130.1Y




Features:

- Laminar, powerful air stream
- Low noise level
(also at higher levels of pressure)
- For the highest demands

Applications:

- Blowing off and out
- Cleaning
- Drying
- Cooling
- Transporting



Series 600.130.1Y

¹ Meets OSHA specification in terms of noise level.

Cost savings and noise reduction



Cost saving




24 %



Noise reduction

22 %

Technical data

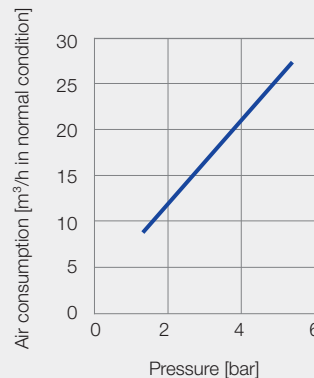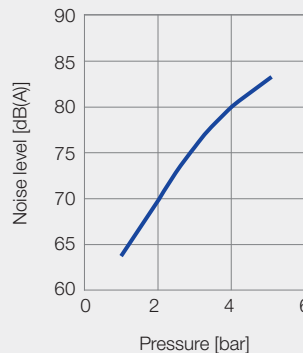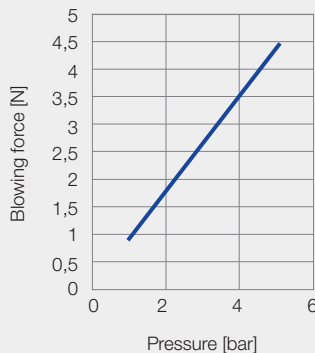


Maximum pressure
10 bar



Maximum temperature
550 °C

Code	G	Dimensions [mm]							Weight [g]
		A	C	D	L ₁	L ₂	L ₃	Ø B	
AC	1/4 BSPP	22.0	13.0	42.0	81.0	53.0	10.5	4.0	100.0
BC	1/4 NPT	22.0	13.0	42.0	81.0	53.0	10.5	4.0	100.0

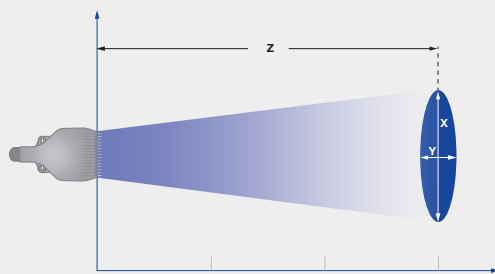

Jet pattern of series 600.130.1Y

Pressure		1 bar	3 bar	5 bar
600.130	Length Z [mm]	300	425	600
	X [mm]	100	140	170
	Y [mm]	56	80	110

Ordering no.			
Type	Mat.-no.	Code	
	1Y		
	Stainless steel 316L	1/4 BSPP	1/4 NPT
600.130	●	AC	BC

Ordering Type + Material no. + Code = Ordering no.
example: 600.130 + 1Y + AC = 600.130.1Y.AC



Assembly accessories can be found in Chapter 9
“Accessories”.