


Multi-channel flat fan nozzles for air “Whisperblast”, metal version Series 600.283.42/600.606.42




Features:

- Laminar, powerful air stream
- Low noise level
(also at higher levels of pressure)
- For the highest demands

Applications:

- Blowing off and out
- Cleaning
- Drying
- Cooling
- Transporting

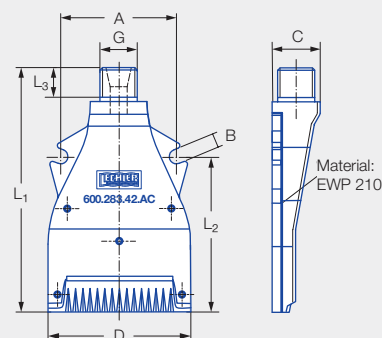

Series 600.283.42/600.606.42


¹ Meets OSHA specification in terms of noise level.

Cost savings and noise reduction

Series 600.283/
Series 600.606






Cost saving



Noise reduction



Technical data

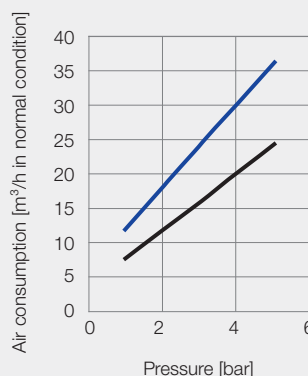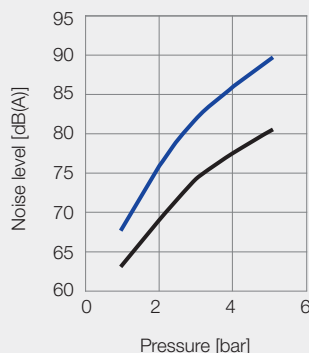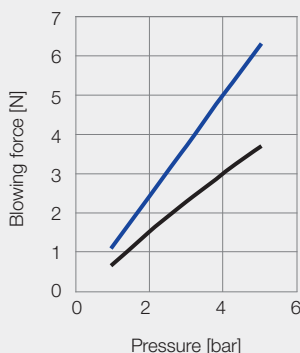


Maximum pressure
10 bar



Maximum temperature
200 °C

— 600.283.42
— 600.606.42

Code	G	Dimensions [mm]							Weight [g]
		A	B	C	D	L ₁	L ₂	L ₃	
AC	1/4 BSPP	41.0	5.1	17.0	51.0	86.5	55.0	10.5	60.0
BC	1/4 NPT	41.0	5.1	17.0	51.0	86.5	55.0	10.2	60.0

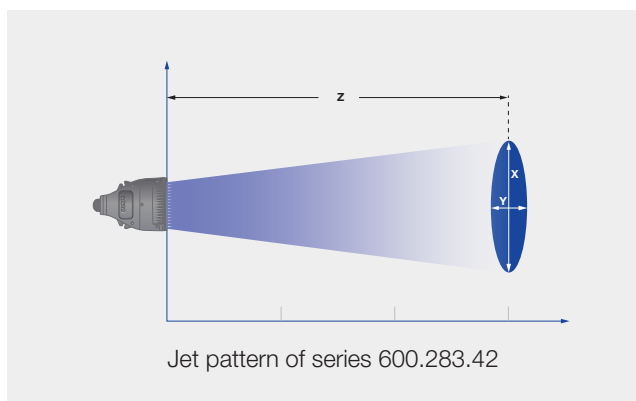

Pressure		1 bar	3 bar	5 bar
600.283	Length Z [mm]	675	900	900
	X [mm]	160	300	460
	Y [mm]	215	215	215
600.606	Length Z [mm]	900	900	900
	X [mm]	200	425	510
	Y [mm]	230	230	230

Ordering no.			
Type	Mat.-no.	Code	
	42 Aluminium 3.2582	1/4 BSPP	1/4 NPT
600.283	•	AC	BC
600.606	•	AC	

Ordering Type + Material no. + Code = Ordering no.
example: 600.283 + 42 + AC = 600.283.42.AC



Assembly accessories can be found in Chapter 9
“Accessories”.