


Multi-channel flat fan nozzles for air “Whisperblast”, stainless steel version Series 600.493.1Y




Features:

- Extremely wide, powerful air stream
- For the highest thermal requirements
- Protecting tips prevent air penetrating your skin

Applications:

- Blowing off and out
- Cleaning
- Drying



Series 600.493.1Y

¹ Meets OSHA specification in terms of noise level.

Cost savings and noise reduction



Cost saving




34 %



Noise reduction

21 %

Technical data

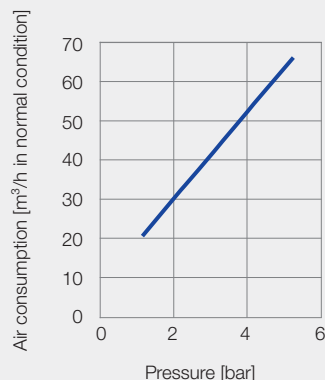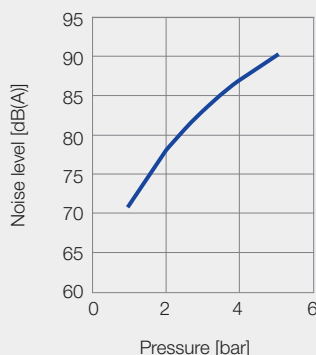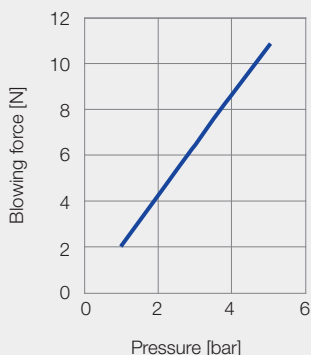


Maximum pressure
30 bar



Maximum temperature
550 °C

Code	G	Dimensions [mm]							Weight [g]
		A	C	D	L ₁	L ₂	L ₃	Ø B	
AC	1/4 BSPP	30.0	16.5	70.0	79.7	53.7	12.0	4.2	130.0
BC	1/4 NPT	30.0	16.5	70.0	79.7	53.7	12.0	4.2	130.0

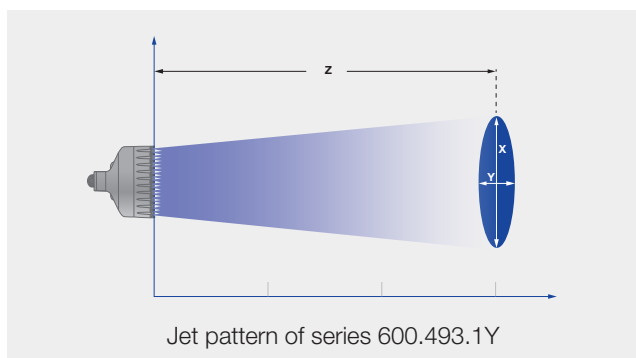

Pressure		1 bar	3 bar	5 bar
600.493	Length Z [mm]	900	900	900
	X [mm]	210	240	270
	Y [mm]	210	210	280

Ordering no.			
Type	Mat.-no.	Code	
	1Y	1/4 BSPP	1/4 NPT
	Stainless steel 316L		
600.493	●	AC	BC

Ordering Type + Material no. + Code = Ordering no.
example: 600.493 + 1Y + AC = 600.493.1Y.AC



Assembly accessories can be found in Chapter 9
“Accessories”.