


Intensive-multi-channel flat fan nozzles for air

Series 600.383.35




Features:

- Concentrated, powerful air jet
- Constant jet depth thanks to flattened design
- Precise work under changing conditions

Applications:

- Blowing off and out
- Cleaning
- Drying

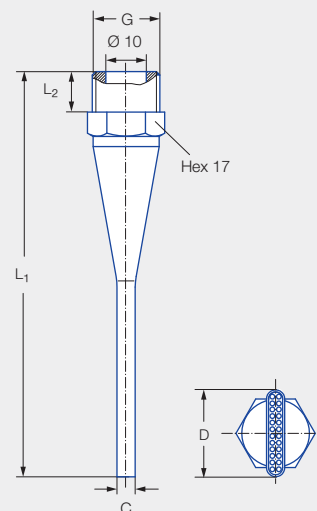

Series 600.383.35

¹ Meets OSHA specifications in terms of noise level.

Cost savings and noise reduction



Cost saving




8%



Noise reduction

10%

Technical data

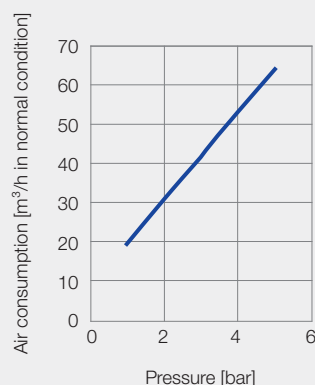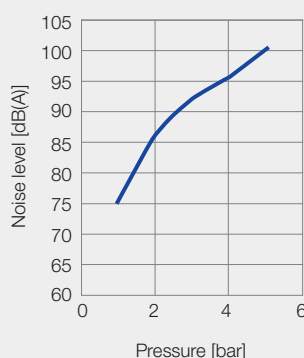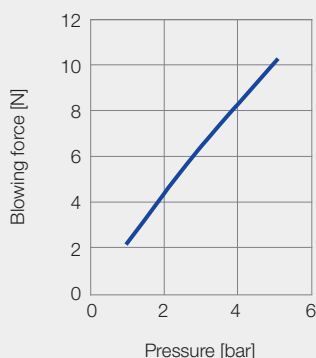


Maximum pressure
10 bar



Maximum temperature
50 °C

Code	G	Dimensions [mm]				Hex	Weight [g]
		C	D	L ₁	L ₂		
AE	3/8 BSPP	6.0	21.0	100.0	10.0	17	60.0

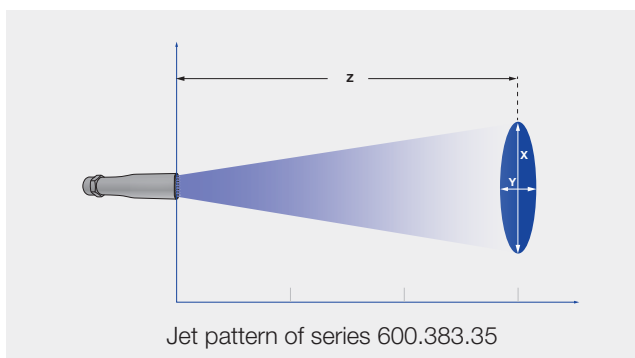

Pressure		1 bar	3 bar	5 bar
600.383	length Z [mm]	900	900	900
	X [mm]	200	425	510
	Y [mm]	230	230	230

Ordering no.		
Type	Mat.-no.	Code
	35	3/8 BSPP
	Brass nickel-plated/PVC	
600.383	●	AE

Ordering Type + Material no. + Code = Ordering no.
example: 600.383 + 35 + AE 600.383.35.AE



Assembly accessories can be found in Chapter 9 "Accessories".