


Micro multi-channel round jet nozzles for air

Series 600.625.1Y

Features:

- Powerful, punctiform air stream
- Ultra-compact design for difficult-to-reach locations
- Low noise level
- Reduced air consumption
- For the highest thermal requirements



Applications:

- Targeted blowing off and blowing out

Series 600.625.1Y

¹ Meets OSHA specification in terms of noise level.

Cost savings and noise reduction



Cost saving




10%



Noise reduction

6%

Technical data

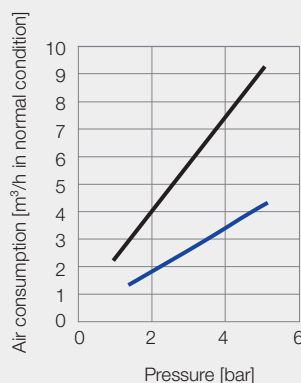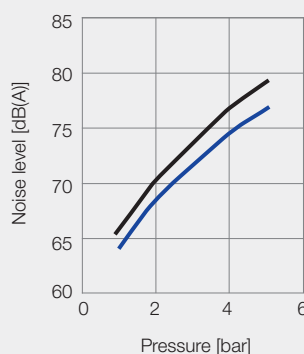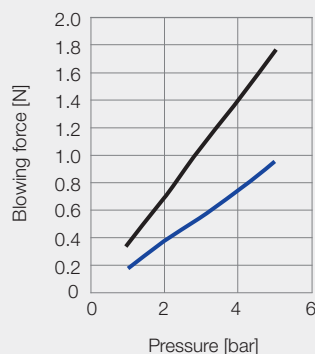


Maximum pressure
5 bar



Maximum temperature
550 °C

— 600.625.1Y.00
— 600.625.1Y.10

Code	G	Dimensions [mm]			Weight [g]
		L ₁	L ₂	Ø D	
00	M4 x 0.5	16.5	5.5	4.0	1.0
10	M5 x 0.5	16.5	5.5	5.0	1.0

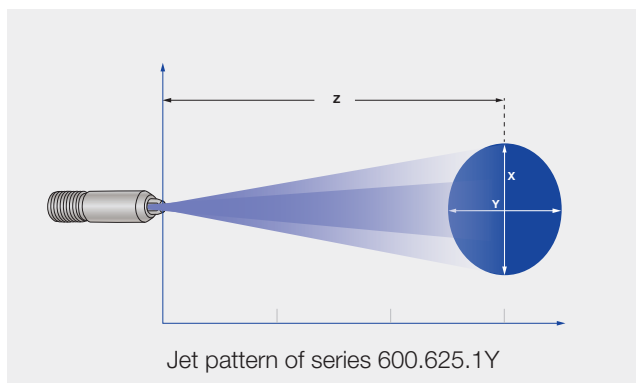

Pressure		1 bar	3 bar	5 bar
600.625.1Y.00	Length Z [mm]	225	400	500
	X [mm]	60	85	110
	Y [mm]	60	85	110
600.625.1Y.10	Length Z [mm]	350	600	825
	X [mm]	80	110	155
	Y [mm]	80	110	155
Ordering no.				
Type	Mat.-no.		Code	
	1Y Stainless steel 316L		M4 x 0.5	M5 x 0.5
600.625	●		00	10

Ordering Type + Material no. + Code = Ordering no.
example: 600.625 + 1Y + 00 = 600.625.1Y.00



Assembly accessories can be found in Chapter 9 "Accessories".