


Multi-channel flat fan nozzles for air “Whisperblast”, stainless steel version Series 600.562.1Y




Features:

- Compact, powerful air stream
- Angled design for applications with restricted installation conditions
- Resistant to higher pressures and temperatures
- Protecting tips prevent air penetrating your skin


Applications:

- Blowing off and out
- Cleaning
- Drying



Series 600.562.1Y

¹ Meets OSHA specification in terms of noise level.

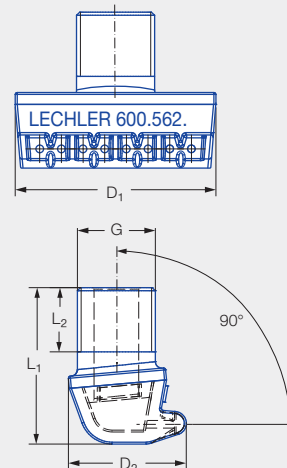

Cost savings and noise reduction



Cost saving




8 %



Noise reduction

14 %

Technical data

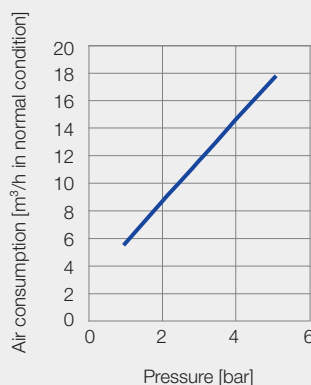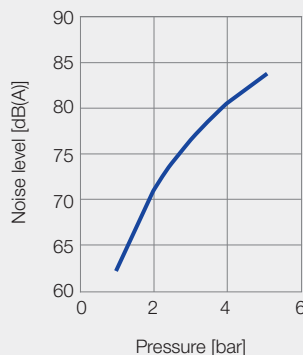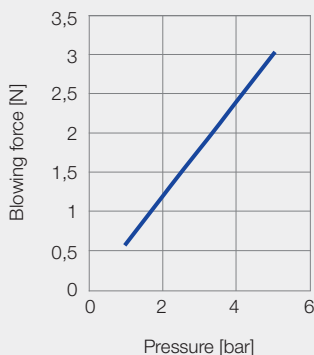


Maximum pressure
30 bar



Maximum temperature
550 °C

Code	G	Dimensions [mm]				Weight [g]
		D ₁	D ₂	L ₁	L ₂	
10	1/8 BSPP	25.0	14.7	19.5	8.0	17.0
20	1/8 NPT	25.0	14.7	19.5	6.7	17.0

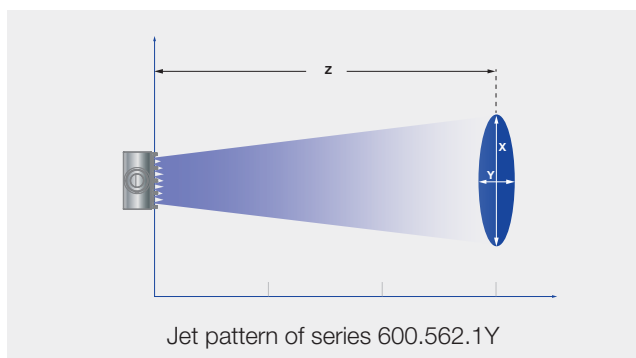

Pressure		1 bar	3 bar	5 bar
600.562	Length Z [mm]	750	900	900
	X [mm]	170	210	240
	Y [mm]	150	180	210

Ordering no.			
Type	Mat.-no.	Code	
	1Y		
	Stainless steel 316L	1/8 BSPP	1/8 NPT
600.562	●	10	20

Ordering Type + Material no. + Code = Ordering no.
example: 600.562 + 1Y + 10 = 600.562.1Y.10



Assembly accessories can be found in Chapter 9 “Accessories”.