

Multi-channel round jet nozzles for air, zinc version


Series 600.326.3W

Features:

- Powerful, circular air stream
- Low noise level
- Reduced air consumption
- Zinc version: Use at high pressure and temperature levels

Applications:

- Targeted blowing off and blowing out (e.g. in connection with a compressed air gun)



Series 600.326.3W

¹ Meets OSHA specification in terms of noise level.

Cost savings and noise reduction



Cost saving




8%



Noise reduction

17%

Technical data

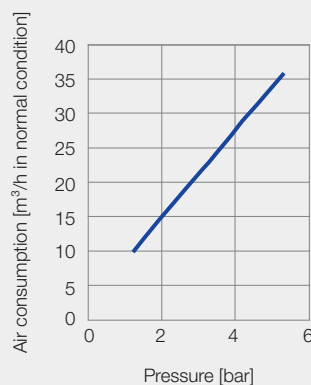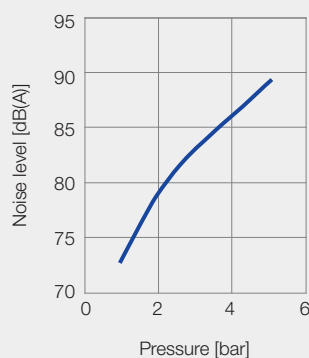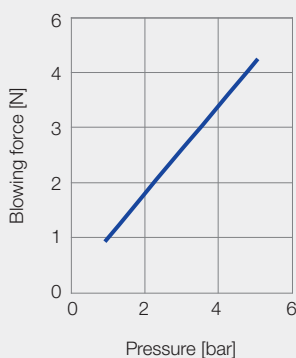


Maximum pressure
10 bar



Maximum temperature
90 °C

Code	G	Dimensions [mm]						Weight [g]
		L ₁	L ₂	L ₃	Ø D ₁	Ø D ₂	Hex	
AC	1/4 BSPP	47.0	12.0	9.0	19.0	23.0	19	50.0
BC	1/4 NPT	47.0	12.0	10.2	19.0	23.0	19	50.0
HG	M12 x 1.25	47.0	12.0	9.5	19.0	23.0	19	50.0

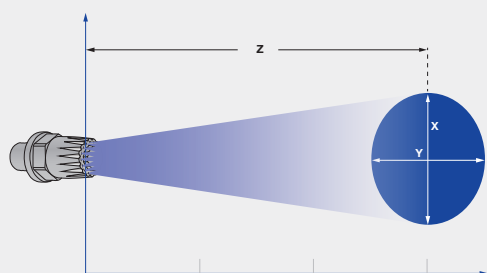

Jet pattern of series 600.326.3W

Pressure		1 bar	3 bar	5 bar
600.326	Length Z [mm]	700	900	900
	X [mm]	180	220	260
	Y [mm]	180	220	260

Ordering no.				
Type	Mat.-no.	Code		
	Zinc	1/4 BSPP	1/4 NPT	M12 x 1.25
600.326.3W	●	AC	BC	HG

Ordering Type + Code = Ordering no.
example: 600.326.3W + AC = 600.326.3W.AC



Assembly accessories can be found in Chapter 9 "Accessories".